



PAN MARINE BLASTING ABRASIVES PTE LTD

Co Reg No 198102190D

32, Tuas Crescent, Singapore 638721 | Tel (65) 6862 4884 | Fax (65) 6861 1368 | Email contactus@pmba.com.sg | www.pmba.com.sg


Authorised distributor for



PRODUCT DATA SHEET

This is a typical analysis of material produced and does not constitute a product certification for material supply.

- Product:** W2 (20-40mm NOM ±8%)
- Appearance:** Gravel
- Main Applications:** Filtration Medium
- Indicative Grading Analysis:** Sieve Standards: ASTM C136, AS1141.11.1, AWS App B
Sampling Methods: ASTM D75, AS1141.3.1

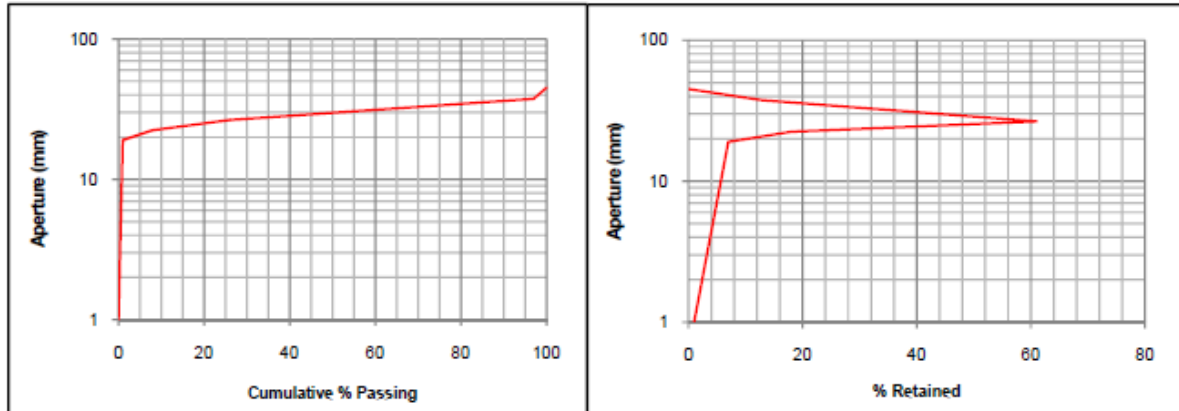

Aperture (mm)	45.0	37.5	28.5	22.4	19.0	Pan
Cum. % Passing	100	87	28	8	1	0
% Retained	0	13	61	18	7	1

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

- Moisture Content
- Bulk Density
- Acid Solubility
- Material <75µm
- Specific Gravity

Limits

- <5%
- Approx. 1.5 t/m³
- <1%
- <1%
- >2.5

Test Methods

- AS 1289.2.1.1, BEWA 18.93
- AS 1141.4 AWS App D
- AWWA-B100 (50% HCl)
- ASTM C117, AS 1141.12
- ASTM C188, AS 1141.5

This product may contain metallic impurities. Please review suitability of this product prior to use.

River Sands operates and maintains a certified quality system in accordance with AS/NZS ISO 9001:2008.

The quality system is third party certified by BCI/NCSI

River Sands also maintains a registered NATA laboratory

Registration #6898

Registration #10470