



PAN MARINE BLASTING ABRASIVES PTE LTD

Co Reg No 198102190D

32, Tuas Crescent, Singapore 638721 | Tel (65) 6862 4884 | Fax (65) 6861 1368 | Email contactus@pmba.com.sg | www.pmba.com.sg

Authorised distributor for



PRODUCT DATA SHEET


This is a typical analysis of material produced and does not constitute a product certification for material supply.

Product: #8 Graded Sand (0.3-0.6mm NOM ±8%)

Appearance: Dry sand, graded to the above specification

Main Applications: Filtration Medium

Indicative Grading Analysis: Sieve Standards: ASTM C136, AS1141.11, AWS App B
Sampling Methods: ASTM D75, AS1141.3.1

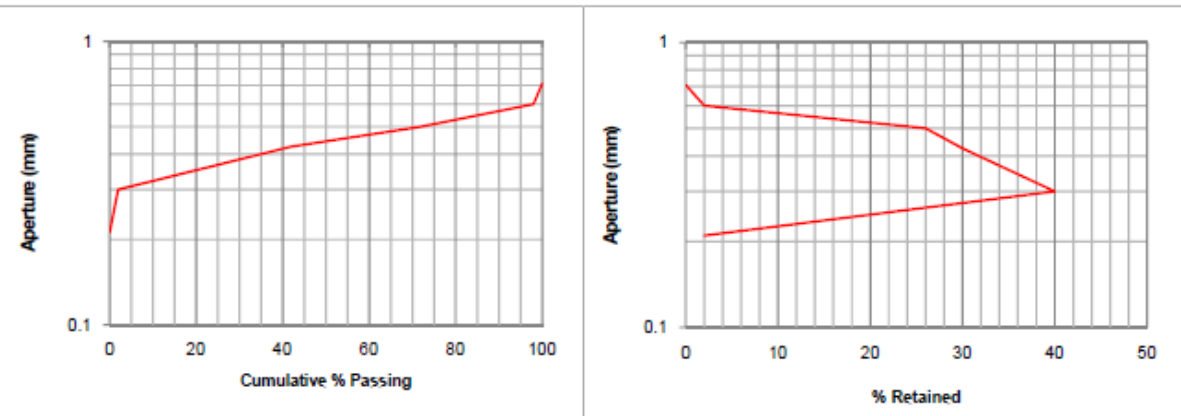

Aperture (mm)	0.71	0.60	0.50	0.425	0.30	0.21	0
Cum. % Passing	100	98	72	42	2	0	0
% Retained	0	2	26	30	40	2	0

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

Moisture Content
Bulk Density
Acid Solubility
Material <75µm
Specific Gravity

Limits

<1%
Approx. 1.5 t/m³
<1%
<1%
>2.5

Test Methods

AS 1289.2.1.1
AS 1141.4 AWS App D
AWWA-B100 (50% HCl)
ASTM C117, AS 1141.2
ASTM C128, AS 1141.5

This product may contain metallic impurities. Please review suitability of this product prior to use.

River Sands operates and maintains a certified quality system in accordance with AS/NZS ISO 9001:2008.

The quality system is third party certified by BCI/NCSI

Registration #6898

River Sands also maintains a registered NATA laboratory

Registration #10470